

HELI

PNEUMATIC TIRE FORKLIFT

- ENHANCED COMFORT THROUGH INNOVATIVE DESIGN
- LEGENDARY HELI QUALITY
- LOW COST OF OWNERSHIP
- POWERFUL PERFORMANCE



8,000-10,000 Lbs

CPYD40
CPYD45
CPYD50
CPCD40
CPCD45
CPCD50



www.HeliForkliftUSA.com



MANUFACTURER: **ANHUI HELI CO., LTD.**

DISTRIBUTOR: SOUTHWEST EQUIPMENT SALES • 4105 GLOBEVILLE ROAD, DENVER, CO 80216
TEL: 888-NEW-HELI (639-4354) • FAX:303-468-9901



SPECIFICATIONS

Manufacturer	HELI						
Model		CPYD40-TY	CPYD45-TY	CPYD50-TY	CPCD40-SA	CPCD45-SA	CPCD50-SA
Load Capacity	lbs	8,000	9,000	10,000	8,000	9,000	10,000
Load Center	in	24	24	24	24	24	24
Lifting Speed	in/s	90	90	84.6	90	90	84.6
Max. Travel Speed	mph	15	11.8	11.8	11.8	11.8	11.8
Max. Drawbar Pull	lbs	4,840	4,840	4,840	4,840	4,840	4,840
Max. Gradeability(Without/With Load)	%	19/20	17/18	16/17	19/20	17/18	16/17
Tilt Angle (F/B)	Y deg	6/12	6/12	6/12	6/12	6/12	6/12
Overall Height Forks Raised	A in	177.1	177.1	177.1	177.1	177.1	177.1
Max. Fork Height	B in	130	130	130	130	130	130
Overall Height Upright Lowered	C in	99.4	99.4	99.4	99.4	99.4	99.4
Free Lift	E in	5.9	5.9	5.9	5.9	5.9	5.9
Overall Length (With Forks)	H in	163.7	164.5	166.2	163.7	164.5	166.2
Overall Length (Without Forks)	I in	121.6	122.4	124.1	121.6	122.4	124.1
Min. Ground Clearance	G in	6.2	6.2	6.2	6.2	6.2	6.2
Overhang (Front/Rear)	K/M in	22.4/20.4	22.4/21.2	22.4/22.9	22.4/20.4	22.4/21.2	22.4/22.9
Wheel Base	L in	78.7	78.7	78.7	78.7	78.7	78.7
Overall Height (With Overhead Guard)	P in	90.1	90.1	90.1	90.1	90.1	90.1
Overall Width	Q in	58.2	58.2	58.2	58.2	58.2	58.2
Opening Of Forks	R in	11.8-52.7	11.8-52.7	11.8-52.7	11.8-52.7	11.8-52.7	11.8-52.7
Tread (Front/Rear)	S/T in	46.4/46.8	46.4/46.8	46.4/46.8	46.4/46.8	46.4/46.8	46.4/46.8
Min. Turning Radius (OutSide)	X in	131.6	132.4	134.2	131.6	132.4	134.2
Min. Intersecting Aisle	W in	107	107.8	110.2	107	107.8	110.2
Fork Size	J/U/F in		42.1/5.9/2.1			42.1/5.9/2.1	
Engine Model			GM4.3L (LPG)			Mitsubishi S6S	
Rated Horsepower	kw/rpm		89/2,300			88/2,300	
Rated Torque	N.m/rpm		228/1,800			209/1,600	
Battery Voltage /Capacity	V/Ah		12/100			2-12/70	
Tires (Front)			300-15-18PR			300-15-18PR	
Tires (Rear)			7.00-12-12PR			7.00-12-12PR	
Total Weight	lbs	14,540	15,120	15,640	14,540	15,120	15,640

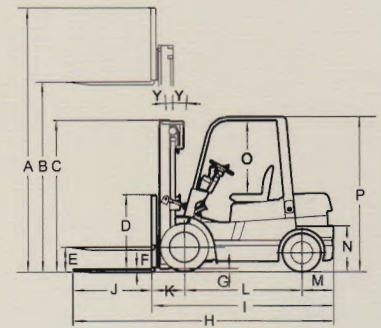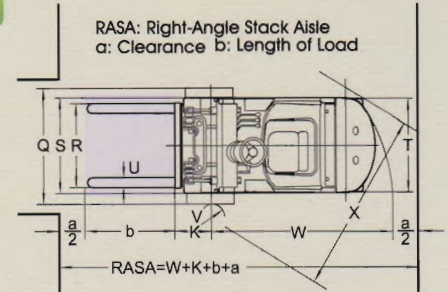

For Your Safety

Before operating a lift truck, an operator must:

- *Be trained and authorized
- *Read and understand the operator's manual
- *Not operate a faulty lift truck
- *Not repair a lift truck unless trained and authorized
- *Have the overhead guard and load backrest extension in place

During operation, a lift truck operator must:

- *Wear a seat belt
- *Keep entire body inside truck cab
- *Never carry passengers or lift people
- *Keep truck away from people and obstructions
- *Travel with lift mechanism as low as possible and tilted back

To park a lift truck, an operator must:


- *Completely lower forks or attachments
- *Shift into neutral
- *Turn key off
- *Set parking brake



CE Certification



ISO9001 Certification



**Southwest
Equipment
Sales**

HELI DISTRIBUTOR FOR WESTERN USA